



OPENINGS

BRICK CHAJJAS

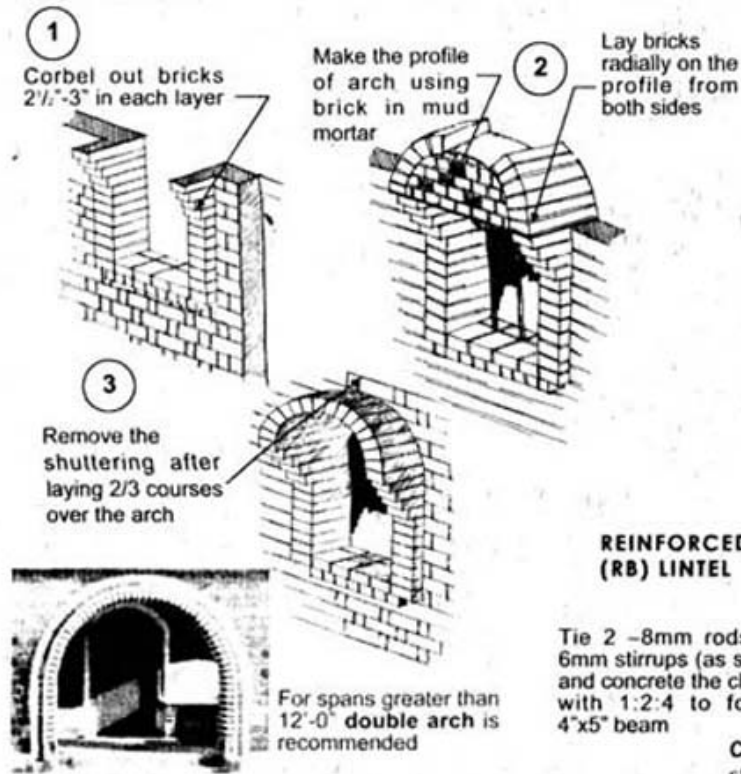


BRICK CHAJJAS & REINFORCED BRICK LINTEL

DIFFERENT TYPES OF ARCHES

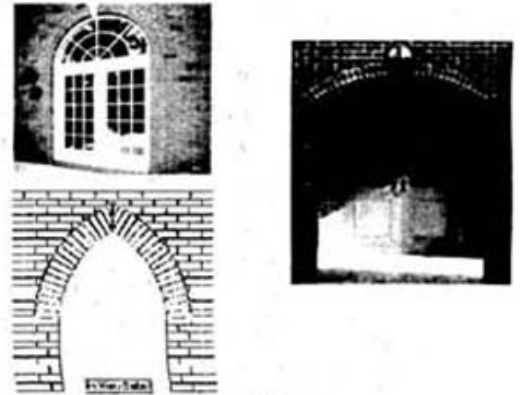

REINFORCED BRICK (RB) LINTEL

Tie 2 -8mm rods with 6mm stirrups (as shown) and concrete the channel with 1:2:4 to form a 4"x5" beam

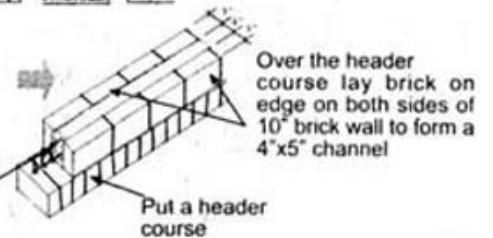

Continuous reinforced brick lintel band strengthens the structure and is recommended for hazard-prone areas

Appropriate Disaster-resistant Housing Technologies

Extracted from
 Good Construction Practices in Appropriate Technologies
 UNDP
 C.eldoc1/J14_/Good_Constru_Practi_Appropri_Techo.pdf